




CE EN 14439 (C/25)

R (m)	S										H											
65	17,9	20	22	24	26	28	30	32,1	35,0	37	40	42	45	47	50	52	55	57	60	62	65	m
	8000	7040	6300	5690	5170	4730	4350	4000	4000	3750	3440	3250	3000	2860	2660	2540	2380	2280	2150	2060	1950	kg
60		19,3	22	24	26	28	30	32	34,5	37,7	40	42	45	47	50	52	55	57	60			m
		8000	6860	6190	5640	5160	4750	4390	4000	4000	3740	3540	3280	3120	2900	2780	2600	2500	2350			kg
55		20,7	22	24	26	28	30	32	35	37,3	40,8	42	45	47	50	52	55					m
		8000	7470	6760	6160	5640	5200	4810	4320	4000	4000	3870	3580	3410	3180	3040	2850					kg
50			22,8	24	26	28	30	32	35	37	40	41,0	45,0	47	50							m
			8000	7530	6860	6300	5810	5380	4840	4530	4120	4000	4000	3800	3550							kg
45				23,7	26	28	30	32	35	37	40	42,8	45,0									m
				8000	7210	6620	6110	5660	5090	4770	4340	4000	4000									kg
40				24,4	26	28	30	32	35	37	40,0											m
				8000	7440	6840	6310	5850	5270	4930	4550											kg
35				24,4	26	28	30	32	35,0													m
				8000	7450	6840	6320	5860	5350													kg
30				24,9	26	28	30,0															m
				8000	7600	6980	6550															kg



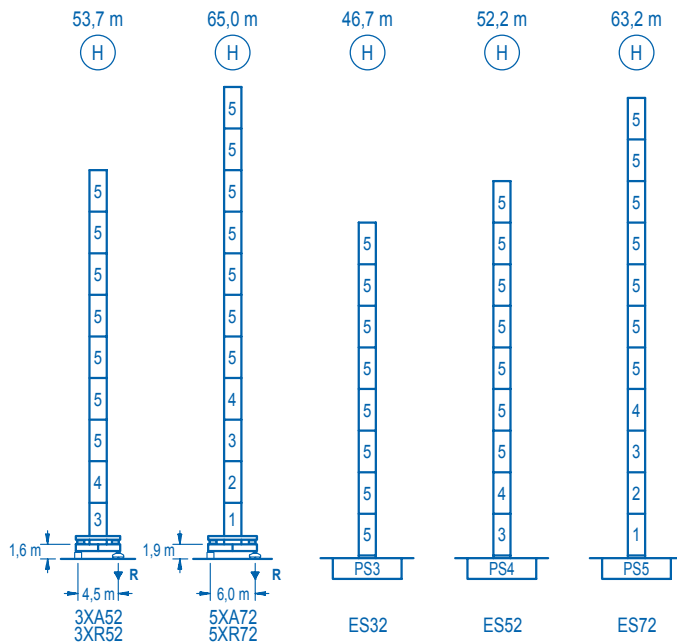

nº	Ref.	∅	h
1	S25	2,0	5,5
2	TS25	2,0	5,5
3	S24	2,0	5,5
4	TS24	2,0	5,5
5	S23	2,0	5,5
6	S15	1,6	5,5
7	CLS15	1,6	3,1

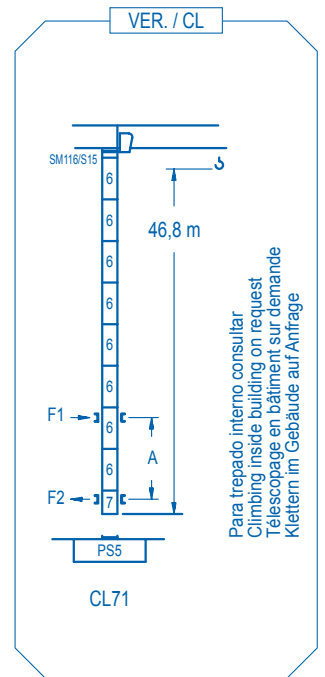

<b>R. máx.</b>	En servicio	
	In operation	3XR52.....90 t
	En service	5XR72.....88 t
In Betrieb		

<b>R. máx.</b>	Fuera de servicio	
	Out of service	3XR52.....98 t
	Hors service	5XR72.....132 t
Ausser Betrieb		

Para otras zonas de viento o alturas superiores consultar  
 For other wind zones or additional hook heights on request  
 Pour d'autres zones de vent ou des hauteurs supplémentaires sur demande  
 Für andere Windzonen oder weiteren Hakenhöhen auf Anfrage

	3XA52	5XA72
A max	40,1	51,4
B max	-	22,0
C max	35,6	35,6
H max	75,7	97,7

	ES32	ES52	ES72
A max	33,1	38,6	49,6
B max	-	22,0	-
C max	35,6	35,6	35,6
H max	68,7	90,7	107,2

	<b>CFU-4.0</b>
	<b>4 kW</b>
0 ⇄ 90 m/min	

	<b>GFU-7.5</b>
	<b>2 x 7.5kW</b>
0 ⇄ 0,7 rpm	

	<b>TRA-7.5</b>
	<b>2 x 75 Nm</b>
0 ⇄ 20 m/min	
3XR52	5XR72

	<b>TRA-7.5VC</b>	*
	<b>2 x 75 Nm</b>	
0 ⇄ 20 m/min		
5XR72		

	<b>EFU4-24-20</b>
440 m	<b>24 kW</b>
	1,0
	2,0

	<b>EFU3-37-20</b>
620 m	<b>37 kW</b>
	1,35
	2,70

Tensión de alimentación	<b>400 V</b>
Operating voltage	<b>3 ph</b>
Tension de service	<b>50 Hz</b>
Betriebsspannung	

Opcional	*
Optional	
En option	
Kaufoption	